


INSTALLATION INSTRUCTIONS FOR FRONT SIGHT SLING MOUNT YHM-9468 FRONT SIGHT ACCESSORY MOUNT YHM-9574

A competent gunsmith familiar with your firearm should install this product. Failure to install this product correctly voids any warranties of the product and removes any liabilities against the manufacturer. Be certain the firearm is unloaded and always pointing in a safe direction before starting this removal and installation process.

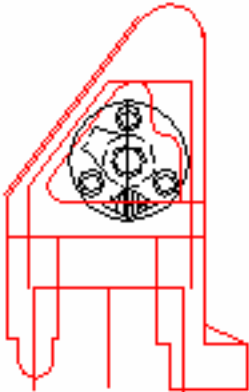

If you purchased YHM-9468

- 1) Take the unit apart.
- 2) Place it on your front sight oriented as shown in the diagram to the left.
- 3) Assemble the three screws and tighten them equally being careful not to over tighten.
- 4) Thread in the swivel stud on the desired side.

If you purchased the front sight accessory mount YHM-9574

- 1) Take the unit apart.
- 2) Place it on your front sight oriented as shown in the diagram above.
- 3) Assemble the three screws and tighten them equally being careful not to over tighten.
- 4) Screw in the dovetail accessory rail into the desired side.
- 5) Assemble the jamb nut onto the stem of the accessory rail from the opposite side and tighten firmly.
- 6) Install the sling stud provided in the end of the accessory stem.